



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



T3

WALK-BEHIND FLOOR SCRUBBER

- Just-scrubbed floors are quickly clean, dry and safe for traffic with ec-H2O™ and FaST® technologies
- Quietly clean noise-sensitive environments with an OSHA-recognized 68.5 dBA
- Easily cleanable, Hygenic® solution and recovery tanks

A HIGH-PERFORMANCE SCRUBBER TO MATCH YOUR HIGHER STANDARDS WITH ec-H2O™ OR FaST® TECHNOLOGY



IMPROVE ENVIRONMENTAL HEALTH IN YOUR FACILITY

Exclusive Hygenic® tanks allow for easy access and help reduce mold, bacteria, and other contaminants that can grow in enclosed tanks.

CLEAN ANY TIME

Quiet operation means more flexible cleaning schedules.

DON'T LEAVE BEHIND CLEANING SOLUTION

Even around 180-degree turns, the T3's equal-pressure, parabolic squeegee recovers cleaning solution from the floor.

ENGINEERED FOR SAFETY


Minimize the risk of slip-and-fall injuries with clean, dry, and safe floors by scrubbing with ec-H2O™ and FaST® technologies.

Reduce operator fatigue and increase productivity. Ergonomic design makes cleaning with the T3 more comfortable.

Increase scrubbing effectiveness and quality. Clear sight lines and simple controls mean operators can focus solely on their cleaning environment.



INSIDE THE T3

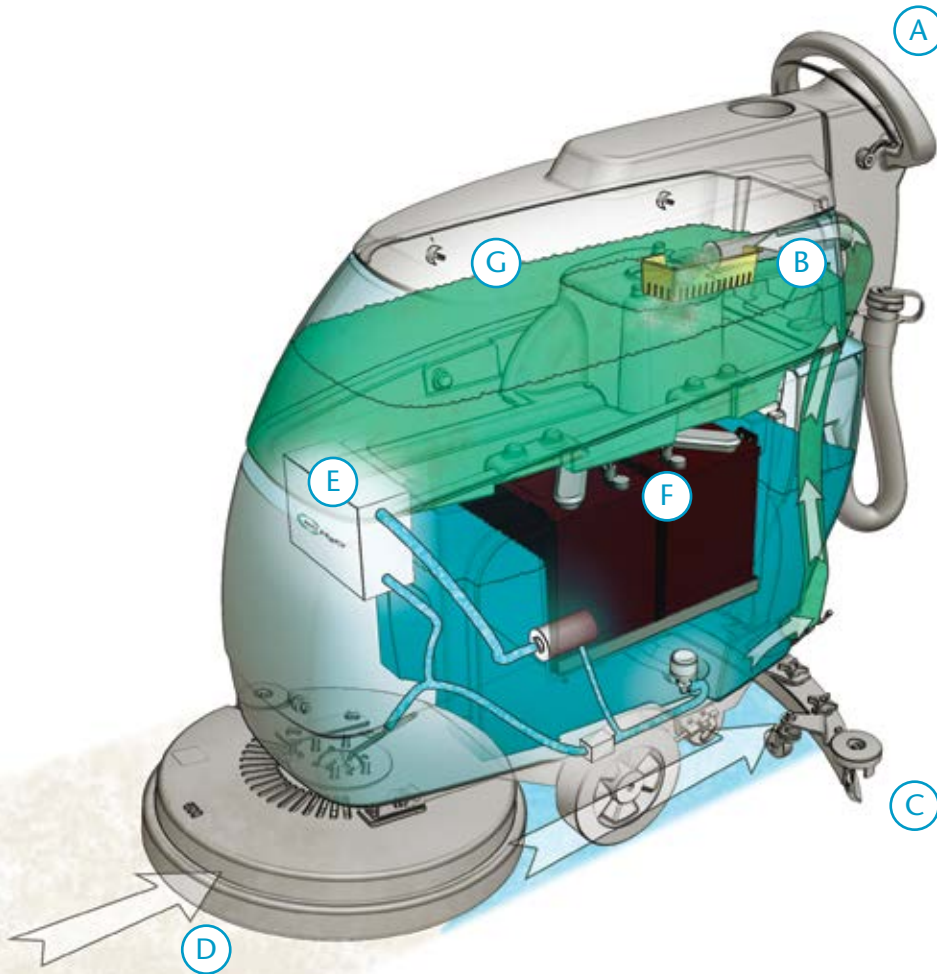

EXCLUSIVE TECHNOLOGIES (optional cleaning innovations)

Both technologies increase scrub time up to three times using a single tank of water.



ec-H2O technology electrically converts water into an innovative cleaning solution that cleans effectively, saves money, improves safety, and reduces environmental impact compared to daily cleaning floor chemicals and methods.



FaST Foam Scrubbing Technology uses up to 70% less water and 90% less chemicals to improve floor traction as certified by NFSI, helping reduce the risk of slip and fall accidents.

- A** Easily train new operators to use the simple, intuitive controls.
- B** Solution and recovery tanks easily cleanable. Exclusive Hygenic® tanks are fully accessible for sanitization.
- C** Quickly remove and replace brushes and squeegees. Plus, with the “no hassle” squeegee system, there are no tools for maintenance, and the blade is factory set at the optimum recovery angle.
- D** Eliminate the need for follow-up passes and non-productive mop-ups. A fully self-adjusting splash skirt captures scrub deck overspray.

- E** Scrub longer on a single tank with Green Seal certified FaST Foam Scrubbing Technology or ec-H2O technology.
- F** Save time and storage space with the onboard charger.
- G** Eliminate operator contact with wastewater and prevent clogged hoses/drains with the convenient debris tray.



ENVIRONMENTAL STEWARDSHIP



ec-H2O™ and FaST® technologies are NSF International (National Floor Safety Institute) Certified. NSF certified products must pass a 2-phase wet slip resistance process and have been shown to reduce the potential for slip-and-fall accidents.



ec-H2O and FaST technologies are registered by NSF International. NSF International is an independent, not-for-profit organization that ensures formulation and labels on these products meet appropriate food safety regulations.



ec-H2O and FaST technologies may contribute to LEED or LEED-EBOM (Existing Building: Operations & Maintenance) points, provided other appropriate criteria are met. For more information on obtaining LEED points, please contact your sales rep or refer to the USGBC website at: www.usgbc.org.



FaST is a Green Seal (GS-37) Certified Detergent. Green Seal evaluates and certifies cleaning products based on criteria such as the toxicity of the product, skin and eye irritation, skin sensitization, combustibility, toxicity to aquatic life, and packaging.



Choose GE Capital or U.S. Bancorp, our leasing providers, for simple, quick financing with flexible upgrade options.

T3 WALK-BEHIND FLOOR SCRUBBER

| SCRUBBING SYSTEM | 17 IN PAD ASSIST | 20 IN PAD ASSIST (20 IN W/DRIVE) |
|-------------------------|---|---|
| Cleaning path | 17 in / 430 mm | 20 in / 510 mm |
| Productivity (per hour) | | |
| Theoretical Max | 20,230 ft ² / 1,900 m ² | 23,800 ft ² / 2,200 m ² |
| Estimated Coverage* | | |
| Conventional | 8,440 ft ² / 780 m ² | 10,125 ft ² / 940 m ² |
| ec-H2O / FaST | 11,250 ft ² / 1,050 m ² | (13,500 ft ² / 1,255 m ²) 13,500 ft ² / 1,260 m ² (15,300 ft ² / 1,420 m ²) |

BRUSH DRIVE SYSTEM

| | |
|------------------------|---------------------------------|
| Brush motor horsepower | 1.0 hp |
| Brush RPM | 230 rpm |
| Brush/pad pressure | 50 lbs / 23 kg & 90 lbs / 41 kg |

SOLUTION DELIVERY SYSTEM

| | |
|---------------------------|-------------------------|
| Solution tank description | Full access & cleanable |
| Solution capacity | 10.5 gal / 40 L |

RECOVERY SYSTEM

| | |
|--|-------------------------|
| Recovery tank description | Full access & cleanable |
| Recovery tank capacity (include demisting chamber) | 15 gal / 57 L |
| Vacuum motor | 0.5 hp – two stage |
| Vac motor CFM | 65 cfm / 1.84 cmm |
| Vac motor sealed waterlift | 40 in / 1,020 mm |

BATTERY SYSTEM

| | | |
|---|----------------|---------------------------------|
| System voltage | 24 volt | |
| Battery amp hour rating | 105 AH @ 20 hr | 130 AH @ 20 hr (155 AH @ 20 hr) |
| Battery run time (continuous cleaning rating) | 2.5 hours | 2.5 hours (3 hours) |

MACHINE SPECIFICATIONS

| | | |
|---------------------------------|------------------|---------------------------------|
| Product length | 48 in / 1,220 mm | 50.25 in / 1,280 mm |
| Product width (with squeegee) | 30 in / 760 mm | |
| Product height | 43 in / 1,090 mm | |
| Product weight (with batteries) | 319 lbs / 145 kg | 343 lbs / 156 kg |
| Power consumption amps | 27 amp nominal | 29 amp nominal (30 amp nominal) |
| Sound level (operator's ear) | 68.5 dBA | |

WARRANTY

See your local representative for warranty information

* Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.

** Run times are based on continuous scrubbing run times.

*** Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment manufacturers & OSHA.

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information, call +1.800.553.8033 or email info@tennantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315

1.001.001.am.en T3 Brochure 7/13

©2013 The Tennant Company logo and other trademarks designated with the symbol "®" are trademarks of Tennant Company registered in the United States and/or other countries. Tennant Company's products are sold and serviced through subsidiaries of Tennant Company and distributors. All rights reserved.

www.tennantco.com
info@tennantco.com